



TEK Flange Adaptor PN16






TEK Flange Adaptor PN16

TEK Universal Flange Adaptor are designed to joint plain ended side pipe of various outside diameters pipes with the same or different nominal bore Mild Steel, Ductile Iron, uPVC, PE, Cast Iron and Asbestos Cement.

- Diameter Range : DN50 – DN1600
- Sleeve & Flanges : Ductile Iron To BS EN 1563 For DN100 - DN300 / Carbon Steel BS EN 10025 For DN50 – DN1600
- Bolt, Nut & Washer : Hot-Dip Galvanized
- Rubber Gasket : EPDM BS 2494 Type WS 672: 99
Other Suitable rubber gasket qualities for Aggressive media are available upon request.
- Coating : : Coated with Hot Fusion Bonded Epoxy Paint.
Other coating will be available upon request.
- Note : Other materials, sizes and dimensions on request.
- Specification : JKR 20200-0048-99

PIPE DN MM	PIPE OD MM	FLANGE SIZE DN	A MM	B MM	C MM	NO	BOLT SIZE MM	HOLE DIA MM	PCD K MM
50	60.3	50	165	19	75	4	M16	18	125
	66								
80	88.9	80	200	19	75	8	M16	18	160
	98								
100	114.3	100	220	19	75	8	M16	18	180
	118								
150	168.3	150	285	22	75	8	M20	22	240
	170								
200	219.1	200	340	22	75	12	M20	22	295
	222								
250	273	250	405	25	90	12	M24	26	355
	274								
300	323.9	300	460	25	90	12	M24	26	410
	326								
350	355.6	350	520	25	120	16	M24	26	470
	378								
400	406.4	400	580	25	120	16	M27	30	525
	429								
450	457	450	640	25	120	20	M27	30	585
	480								
500	508	500	715	25	120	20	M30	33	650
	532								
600	610	600	840	25	140	20	M33	36	770
	635								
700	711	700	910	25	140	24	M33	36	840
800	813	800	1025	25	140	24	M36	39	950
900	914	900	1125	25	140	28	M36	39	1050
1000	1016	1000	1255	25	140	28	M39	43	1170
1200	1219	1200	1485	38	150	32	M45	49	1390
1400	1422	1400	1685	38	150	36	M45	49	1590
1600	1626	1600	1930	60	200	40	M52	56	1820

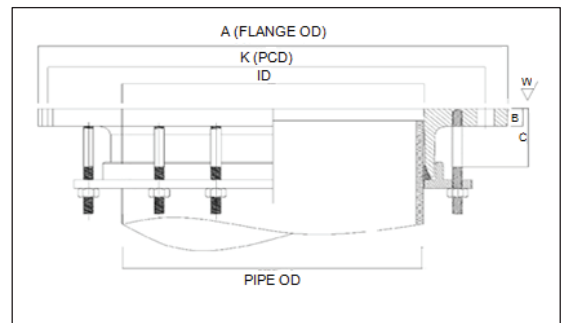

Remark : Flange Adaptor for HDPE Pipe is also available.
The above specifications are for illustration purposes only.
Other sizes are also available upon request.