



TEK Pillar Hydrant


Ductile Iron Pillar Hydrant



TEK Pillar Hydrant

Ductile Iron Pillar Hydrant

- Diameter Range : DN 100
- Maximum Working Pressure : 16 bar
- Applied Pressure : Shell Test – 24 bar
- Specification : JKR 20200-0042-99

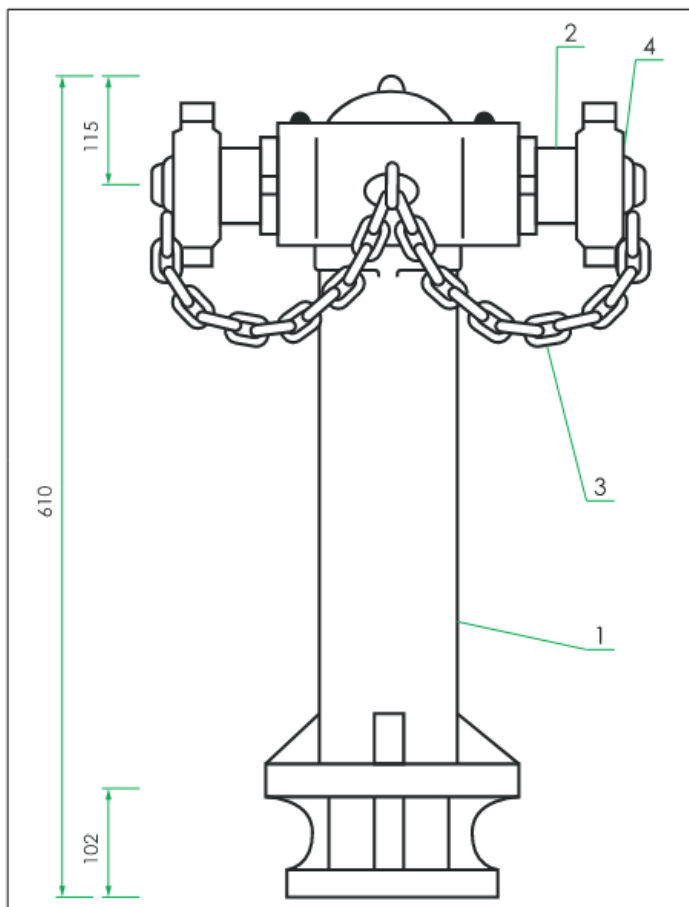

SPECIFICATIONS

No	Description	Material Description
1	Body	Ductile Iron, BS EN 1563 Grade 500/7
2	Outlet	Gunmetal BS 1400
3	Chain	Galvanized Iron
4	Cap	Ductile Iron, BS EN 1563 Grade 500/7

NOTE :

1. UNIT OF MEASUREMENT : MM
2. THE DESIGN ,MATERIALS AND SPECIFICATIONS SHOWN ARE SUBJECT TO CHANGE WITHOUT NOTICE DUE TO OUR CONTINUING PROGRAME OF PRODUCT DEVELOPMENT.