



## TEK Check Valve

Double Flange Ductile Iron PN16 Swing Check Valve  
For Water, Sewerage and Neutral Liquids.






# TEK Check Valve

## Double Flange Ductile Iron PN16 Swing Check Valve For Water, Sewerage and Neutral Liquids

- Diameter Range : DN50-DN600
- Maximum Working Pressure : BSEN1092 PN16, other standard upon request.
- Coating : High Solid Epoxy Coating as standard, other coating upon request
- Features : Removable cover on top of valve body casing for easy maintenance of the door
- Specification : BSEN 12334 : 2001 / BS EN 16767 : 2020

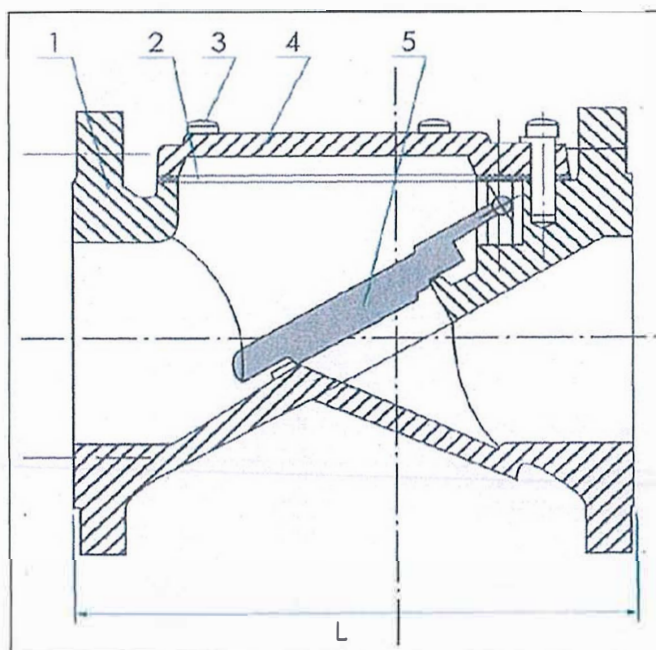

### DIMENSIONS

| DN    | L    | D   |
|-------|------|-----|
| DN50  | 203  | 165 |
| DN80  | 241  | 200 |
| DN100 | 292  | 220 |
| DN150 | 356  | 285 |
| DN200 | 495  | 340 |
| DN250 | 622  | 405 |
| DN300 | 698  | 460 |
| DN350 | 787  | 520 |
| DN400 | 914  | 580 |
| DN450 | 978  | 640 |
| DN500 | 978  | 715 |
| DN600 | 1295 | 840 |

### SPECIFICATIONS

| No | Part     | Material Description                 |
|----|----------|--------------------------------------|
| 1  | Body     | Ductile Iron, BS EN 1563 Grade 500/7 |
| 2  | Gasket   | EPDM BS 2494 Type W/MS 672:99        |
| 3  | Cap Bolt | Stainless Steel/HDG                  |
| 4  | Bonnet   | Ductile Iron, BS EN 1563 Grade 500/7 |
| 5  | Disc     | EPDM BS 2494 Type W/MS 672:99        |

#### NOTE :

1. UNIT OF MEASUREMENT: MM
2. THE DESIGNS, MATERIALS AND SPECIFICATION SHOWN ARE SUBJECT TO CHANGE WITHOUT NOTICE DUE TO OUR CONTINUING PROGRAMME OF PRODUCT DEVELOPMENT.